

H81XX SERIES

Sub-tenant Meter with Calibrated CTs for Superior System Accuracy



The H81xx Series Energy Meters are easy to install and provide exceptional system accuracy, making them ideal for all sub-metering applications.

Each meter is factory-matched with one to three split-core CTs. The meter/CT pairs are system-calibrated to provide excellent total system accuracies of 1% from 2% to 100% of the amperage rating of the CTs (e.g., 2 to 100 A with 100 A CTs). Matching serial numbers assure that the meter and CT were calibrated together (matching does not apply if using 100 A CTs).

The H81xx is easy to install. The split-core CTs virtually eliminate the need to remove electrical conductors, reducing installation time. The meter is also capable of detecting and correcting phase reversal, eliminating the need for concern about CT load orientation. The convenient color coding of the CTs and voltage leads make correct connection simple.

SPECIFICATIONS

INPUTS (VOLTAGE)	
H8150	90 to 132 Vac line-to-neutral
H8163	90 to 300 Vac line-to-neutral
ACCURACY	
System Accuracy	±1% of reading from 2% to 100% of the rated current of the CTs, accomplished by matching the CTs with electronics and calibrating them as a system
Sample Rate	1280 Hz
OUTPUTS	
LCD Display All Models	1.2" x 3.8" (31 mm x 97 mm) viewing area, 160 segments, backlit with LCD
H8163 ONLY	
Pulse Output	Normally open, Opto-FET, 100 mA@24 Vac/dc
Pulse Rate	0.10 ¹ , 0.25 ² , 0.50, or 1.00 kWh per pulse
Pulse Width	200 msec closed
Phase Loss Alarm	N.O. (opens on alarm), Opto-FET, 100 mA @ 24 Vac/dc; fixed threshold 25% below

Revenue grade measurements

Meets ANSI C12.20 Class 0.2 standards

Equipment protection

Phase-loss alarm (H8163)

LCD display

High resolution backlit LCD display provides clear readings at a distance...reduces the risk of data misinterpretation. Back-lighting can be disabled if desired.

Easy connection

H8163 provides a pulse output from 1/10 to 1 pulse per kWh for easy connection to existing control or data acquisition systems

Reduce installation costs

With the optional communications board (H81xx-CB), the H81xx can easily be added to a Modbus, BACnet or N2 control system network to report multiple variables including kW, kWh, kVAR, PF, amps and volts, providing crucial power information at a reduced installation cost

APPLICATIONS

- Commercial tenant sub-metering
- Performance contracting
- Allocating costs
- Real-time power monitoring via local display or through control/data acquisition systems

ENVIRONMENTAL	
Protection Class	NEMA 1
Altitude of Operation	2000 m
Operating Temp Range	0 to 50 °C (32 to 122 °F)
Storage Temp Range	-40 to 70 °C (-40 to 158 °F)
Humidity Range	0 to 95% non-condensing; indoor use only
WARRANTY	
Limited Warranty	5 years
AGENCY APPROVALS	
Agency Approvals	UL61010-1, Cat. III, Pollution Degree 2




Approved for California CSI Solar applications (check the CSI website for model numbers).
 1. Not supported at >1600 A.
 2. Not supported at >2400 A.
 Note: Meter and CTs serial numbers must match, except for 100A CTs. Neutral voltage connection is required.




208/120 Vac, 4-WIRE, 3Ø, 200 A SERVICE

Wiring Diagram

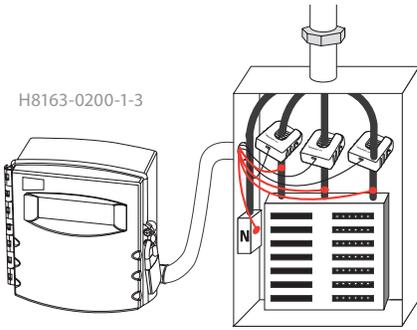


240 Vac, 3-WIRE, SINGLE PHASE, 100 A SERVICE

Wiring Diagram

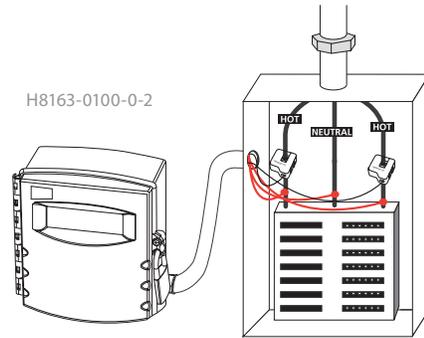


120 Vac, 2-WIRE, SINGLE PHASE, 100 A SERVICE

Wiring Diagram

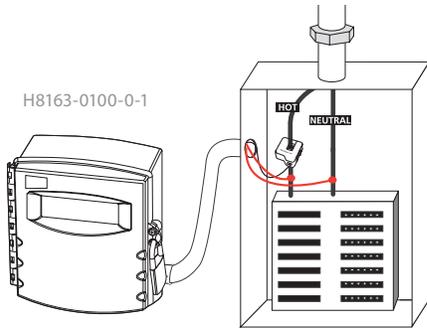

DIMENSIONAL DRAWING

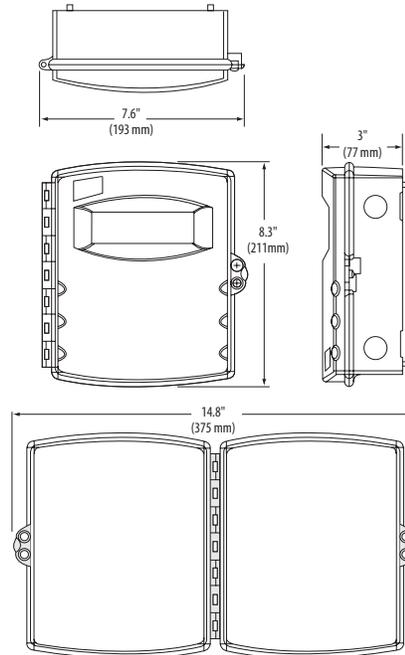

DATA OUTPUTS

kWh, Consumption
 kW, Real power
 kVAR, Reactive power
 kVA, Apparent power
 Power factor
 Voltage, line to line
 Voltage, line to neutral
 Amps, Average current
 kW, Real Power ØA
 kW, Real Power ØB
 kW, Real Power ØC
 Power factor ØA
 Power factor ØB
 Power factor ØC
 Voltage, ØA to ØB

Voltage, ØB to ØC
 Voltage, ØA to ØC
 Voltage, ØA to Neutral
 Voltage, ØB to Neutral
 Voltage, ØC to Neutral
 Amps, Current ØA
 Amps, Current ØB
 Amps, Current ØC
 Demand kW and kVAR *
 Peak Demand *
 Time Stamp *

* With H8163-CB Communications Board installed

ORDERING INFORMATION

120 Vac to 240 Vac (nom.)

AMPS	1 CT	2 CTs	3 CTs	VOLTAGE	OUTPUT
100 Micro	H8150-0100-0-1	H8150-0100-0-2	H8150-0100-0-3	120 Vac L-N	Display Only
200 Mini	H8150-0200-1-1	H8150-0200-1-2	H8150-0200-1-3		
300 Small	H8150-0300-2-1	H8150-0300-2-2	H8150-0300-2-3		
400 Med		H8150-0400-3-2	H8150-0400-3-3		
800 Med		H8150-0800-3-2	H8150-0800-3-3		
800 Lg			H8150-0800-4-3		
1600 Lg			H8150-01600-4-3		
2400 Lg			H8150-2400-4-3		

120 Vac to 480 Vac (nom.) with Pulse and Phase Loss Outputs

AMPS	1 CT	2 CTs	3 CTs	VOLTAGE	OUTPUT
100 Micro	H8163-0100-0-1	H8163-0100-0-2	H8163-0100-0-3	120 to 480 Vac	Pulse & Phase Loss
200 Mini	H8163-0200-1-1	H8163-0200-1-2	H8163-0200-1-3		
300 Small	H8163-0300-2-1	H8163-0300-2-2	H8163-0300-2-3		
400 Med		H8163-0400-3-2	H8163-0400-3-3		
800 Med		H8163-0800-3-2	H8163-0800-3-3		
800 Lg			H8163-0800-4-3		
1600 Lg			H8163-01600-4-3		
2400 Lg			H8163-2400-4-3		

ACCESSORIES P. 81

